


LOGIBALL SECURIMAX PLUGS

The Logiball SECURIMAX plugs are often referred to as the “Work Horse” plugs. High safety factors such as strong anchoring & end plate retaining devices, premium quality rubber sleeves with two ply cross biased reinforcing cords and manufacturing under strict quality controls have made the Securimax Plugs the field proven choice of professionals for 30 years.

Each plug, identified with a serial number, must pass a severe pressure test and is supplied with a test certificate and a leaflet describing its features and information on its safe use.

These sewer plugs can be used for low acceptance testing, plugging and flow control needs in pipe sizes 4” to 36”. Factory replaceable rubber sleeves.

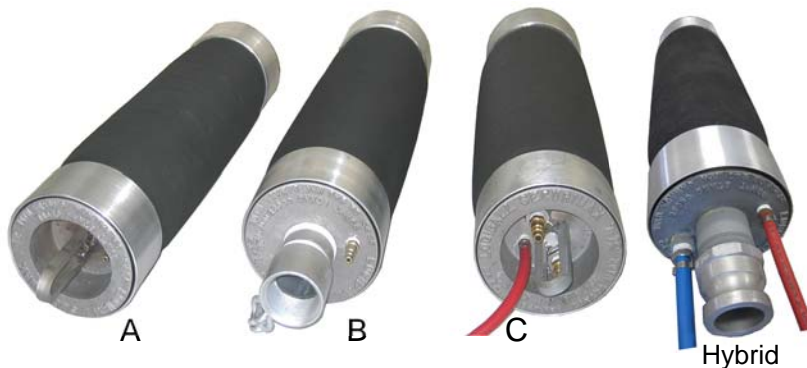

Model A: No-flow-thru
 Model B: 1/2” flow-thru on the 4-8
 2” flow-thru on the 5-10 &
 up
 Model C: Two 1/2” flow-thru hoses

A hybrid between models B & C with
 2” bypass & 1/2” bypass for faster low
 acceptance testing is also available on
 size 7-12 & up.



Pipe Size (inches)	Inflation Pressure ¹	Diameter (inches)	Weight (lbs)	Length (inches)	Models Available
4-8	45 psi	3.5	6	18.5	B
5-10	45 psi	5.0	15	26	A, B, C
7-12	35 psi	6.6	26	28.5	A, B, C
9-16	35 psi	8.9	37	30	A, B, C
11-21	35 psi	10.9	50	35.5	A, B, C
13-24	35 psi	12.6	66	39	A, B, C
17-30	25 psi	16.75	130	58	A, B, C
19-36	20 psi	18.75	166	64	A, B, C

¹ At these pressures, the plugs will make a tight seal and safely withstand a back pressure of 5 p.s.i. or 12 feet of water in structurally sound and clean pipes.

Eventhough we build our plugs to last a long time, no rubber plug will last forever!
 Logiball can repair & resleeve all Securimax Plugs.

www.logiball.com

Tel: 418-656-9767

800-246-5988