




# SLEEVE INSTALLERS: LOGIBALL 6"-36" SLEEVE INSTALLER

Logiball's line of Sleeve Installers covers 6 to 36 inch pipes in lengths as long as 25 feet if required.

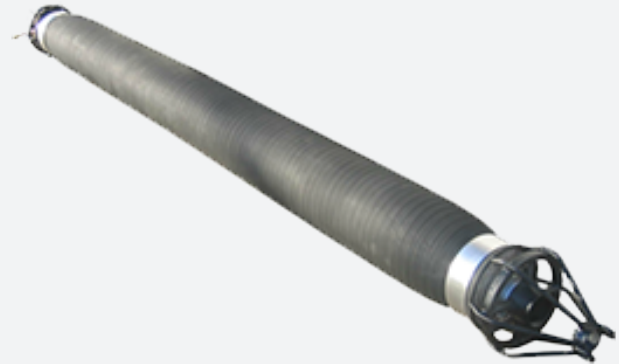

## PRODUCT DESCRIPTION

Ambient cure sectional sleeve Installers for CIPP Spot Repair are used by most contractors for their cured in place point repair systems in sewer lines. Logiball Sleeve Installers are the best choice for a safe and easy-to-use inflatable carrier. Sleeve Installers are available in length up to 25 feet for 6" through 36" pipes.

## PRODUCT SPECIFICATION

Product code	Pipe Size inch / mm	OD inch/cm [+/-]	Pulling cage OD inch / cm [+/-]	Approx. contact length of rubber		Flow-thru	Weight	
				6" / 15cm	8" / 20cm			
6-8BSI-78	6-8 / 152-200	4 / 10	4 / 10	66" / 168cm	63" / 160cm	1/2" / 1.3cm	18 lbs	
6-8BSI-120	6-8 / 152-200	4 / 10	4 / 10	108" / 274cm	105" / 267cm	1/2" / 1.3cm	22 lbs	
6-8BSI-138	6-8 / 152-200	4 / 10	4 / 10	126" / 320cm	123" / 312cm	1/2" / 1.3cm	24 lbs	
				8" / 20cm	10" / 25cm			
8-10BSI-84	8-10 / 200-250	5.5 / 14	5.5 / 14	71" / 180cm	68" / 173cm	2" / 5cm	35 lbs	
8-10BSI-132	8-10 / 200-250	5.5 / 14	5.5 / 14	119" / 302cm	116" / 295cm	2" / 5cm	48 lbs	
8-10BSI-144	8-10 / 200-250	5.5 / 14	5.5 / 14	131" / 333cm	128" / 325cm	2" / 5cm	52 lbs	
				10" / 25cm	12" / 31cm			
10-12BSI-84	10-12 / 250-300	7.5 / 19	7.5 / 19	69" / 175cm	65" / 165cm	2" / 5cm	53 lbs	
10-12BSI-120	10-12 / 250-300	7.5 / 19	7.5 / 19	105" / 267cm	101" / 257cm	2" / 5cm	64 lbs	
10-12BSI-138	10-12 / 250-300	7.5 / 19	7.5 / 19	123" / 312cm	119" / 302cm	2" / 5cm	68 lbs	
				12" / 31cm	15" / 38cm			
12-15BSI-96	12-15 / 300-375	9 / 23	9.5 / 24	81" / 206cm	75" / 191cm	2/3" 5/8cm	72 lbs	
12-15BSI-132	12-15 / 300-375	9 / 23	9.5 / 24	117" / 297cm	111" / 282cm	2/3" 5/8cm	80 lbs	
12-15BSI-144	12-15 / 300-375	9 / 23	9.5 / 24	129" / 328cm	123" / 312cm	2/3" 5/8cm	90 lbs	
				15" / 38cm	18" / 45cm	21" / 55cm		
15-21BXXSSI-96	15-21 / 375-525	11.25 / 29	11.25 / 29	79" / 201cm	76" / 193cm	69" / 175cm	2/3" 5/8cm	114 lbs
15-21BXXSSI-114	15-21 / 375-525	11.25 / 29	11.25 / 29	97" / 246cm	94" / 239cm	87" / 221cm	2/3" 5/8cm	121 lbs
15-21BXXSSI-132	15-21 / 375-525	11.25 / 29	11.25 / 29	115" / 292cm	112" / 284	105" / 267cm	2/3" 5/8cm	138 lbs
				18" / 45cm	21" / 55cm	24" / 60cm		
18-24BXSSI-96	18-24 / 450-600	13.25 / 34	13.25 / 34	77" / 196cm	72" / 183cm	67" / 170cm	2", 3" OR 4"	116 lbs
18-24BXSSI-108	18-24 / 450-600	13.25 / 34	13.25 / 34	89" / 226cm	84" / 213cm	79" / 201cm	2", 3" OR 4"	125 lbs
18-24BXSSI-132	18-24 / 450-600	13.25 / 34	13.25 / 34	113" / 287cm	108" / 274cm	103" / 262cm	2", 3" OR 4"	143 lbs
				24" / 60cm	27" / 67.5cm	30" / 75cm		
24-30BXSSI-102	24-30 / 600-750	17 / 43	18 (SKIDS) / 46	76" / 193cm	70" / 178cm	65" / 165cm	2", 3" OR 4"	213 lbs
24-30BXSSI-120	24-30 / 600-750	17 / 43	18 (SKIDS) / 46	94" / 239cm	88" / 224cm	83" / 211cm	2", 3" OR 4"	231 lbs
24-30BXSSI-138	24-30 / 600-750	17 / 43	18 (SKIDS) / 46	112" / 284cm	106" / 269cm	101" / 257cm	2", 3" OR 4"	243 lbs
				27" / 67.5cm	30" / 75cm	36" / 90cm		
27-36BXSSI-102	27-36 / 675-900	19 / 48	21 (SKIDS) / 53	77" / 196cm	72" / 183cm	64" / 163cm	2", 3" OR 4"	207 lbs
27-36BXSSI-120	27-36 / 675-900	19 / 48	21 (SKIDS) / 53	95" / 241cm	90" / 229cm	84" / 213cm	2", 3" OR 4"	228 lbs
27-36BXSSI-144	27-36 / 675-900	19 / 48	21 (SKIDS) / 53	119" / 302cm	114" / 290cm	108" / 274cm	2", 3" OR 4"	277 lbs

## KEY FEATURES

- Made of a two-ply cross-biased reinforced rubber sleeve.
- Sleeve Installers are available in lengths **up to 25 feet**.
- Factory replaceable sleeves are available.
- Contact our sales department to help you choose the best installer for your application.